




过滤减压阀/Filter Regulator HNAW2000-5000 系列/Series



符号/Symbol



规格/Specification

保证耐压力 /Ensured Pressure Resistance	1.5MPa(15kgf/cm ²)
最高使用压力 /Highest Working Pressure	1.0MPa(10kgf/cm ²)
环境及流体温度 /Ambient and Fluid Temperature	5-60°C
*过滤精度 /*Filter Precision	25μm
容器材料 /Container Material	铝压铸件/Aluminum Die Casting
调压范围 /Pressure Regulating Range	0.05-0.85MPa(0.5-8.5kgf/cm ²)
阀型 /Valve Type	带溢流性/With Overflow

*还有5,50μm可供选择/*5,50μm available in addition


型号 Model	规格/Specifications				配件/Accessories		放水器功能 /Drain Function	自动排水型号 /Auto Drain Function	
	*额定流量 /Rated Flow (L/min)	**接管口径 /Port Size (G)	压力表口径 /Pressure Gauge Size(G)	重量 /Weight (kg)	托架 /Bracket (2个)	压力表 /Pressure Gauge			
HNAW2000-01M	550	1/8	1/8	0.29	B220	G36-10-01	手动排水	HNAW2000-01MD	
HNAW2000-02M		1/4					/Manual Drain	HNAW2000-02MD	
HNAW3000-02M	2000	1/4	1/8	0.55	B320		a.停气排水 /Air Shut Off Drain	HNAW3000-02MD	
HNAW3000-03M		3/8						HNAW3000-03MD	
HNAW4000-03M	4000	3/8	1/4	1.16	B420	G46-10-02		b.手动排水 /Manual Drain	HNAW4000-03MD
HNAW4000-04M		1/2							HNAW4000-04MD
HNAW4000-06M	4500	3/4	1/4	1.2			HNAW4000-06MD		
HNAW5000-06M	5500	3/4	1/4	1.79					HNAW5000-06MD
HNAW5000-10M		1			HNAW5000-10MD				

*供应压力为0.7MPa(7.1kgf/cm²)情况下


*Under the circumstance that the supply pressure is 0.7MPa(7.1kgf/cm²)

**接管口径另有Rc,NPT螺纹可供选择


Rc and NPT port size are available



HNAW2000

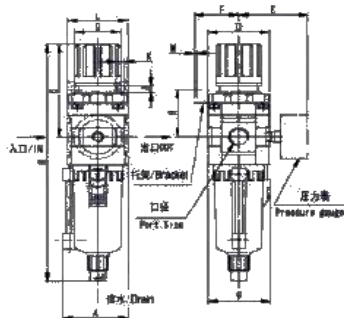

HNAW3000~4000

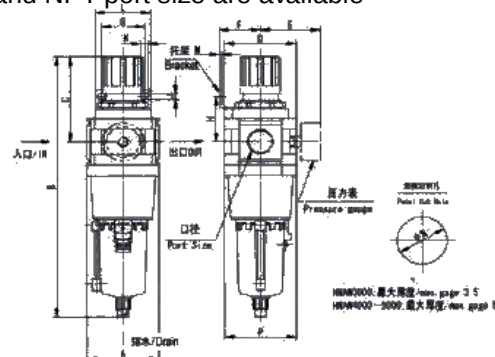

HNAW5000

型号 Model	口径/Port Size(G)	A	B	C	D	E	F	G	H	J	K	L	M	P
HNAW2000	1/8-1/4	40	186.5	78	40	56.8	57	34	43.5	5.4	55	55	2.3	46
HNAW3000	1/4-3/8	57.5	232.5	92.5	53	60.8	61	40	46	8	53	53	2.3	55
HNAW4000	3/8-1/2	74	278	112	70	70.5	71	54	53.5	10.5	70	70	2.3	72.5
HNAW4000-06	3/4	76.5	282	114	70	70.5	71	54	55.5	10.5	70	70	2.3	72.5
HNAW5000	3/4-1	90	355	116	90	75.5	76	54	62	10.5	70	70	3.2	90