




5/2 SOLENOID VALVE

Features

- 5 Port pilot type
- NAMUR interface
- Straight-through flow, C_v 1.0
- Simple design of soft seal spool system
- Maintenance-free
- Easy to service
- Easily interchangeable solenoid system
- Compact design
- Standard manual override

Specification


- Model : UIC4101 - Series
- Port Size : G1/4"
- Enclosure : IP65
- Fluids : Air
- Pressure : 1.5 ~ 8.5 Bar
- Ambient Temperature : 5 to 60 °C
- Weight : 0324 Kg

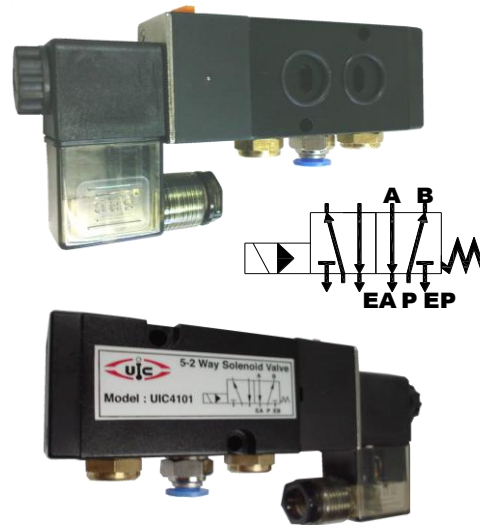

Standard Voltage : 24VDC, 110 VAC, 240VAC (50/60Hz)

Coil	Degree of protection to DIN coil	Rated power at		
		24VDC	110VAC	240VAC
	IP 65	4.8 VA	5.5 VA	5.5 VA

Description

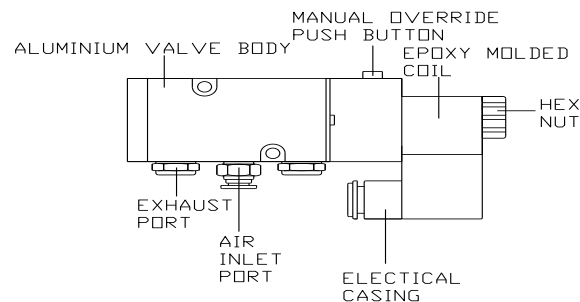

Dimensional drawings

