



K SERIES PNEUMATIC BALL VIBRATOR

Product Features:

Vibration intensity according to the pressure regulator, affordable, long life, safe, can be used in damp, dust and explosion sites.

Application:


Feed material conveyor, vibrating screening, vibrating hopper, to help full packaging, foundry sand mold vibration.

Works:

Means for precision steel sleeve and the ball, the outer shell sealed by a special aluminium alloy, to promote the use of air charged into the rotary sleeve in the steel ball weight ball and the distance between the center of the centrifugal force generated vibration.



Dimensions

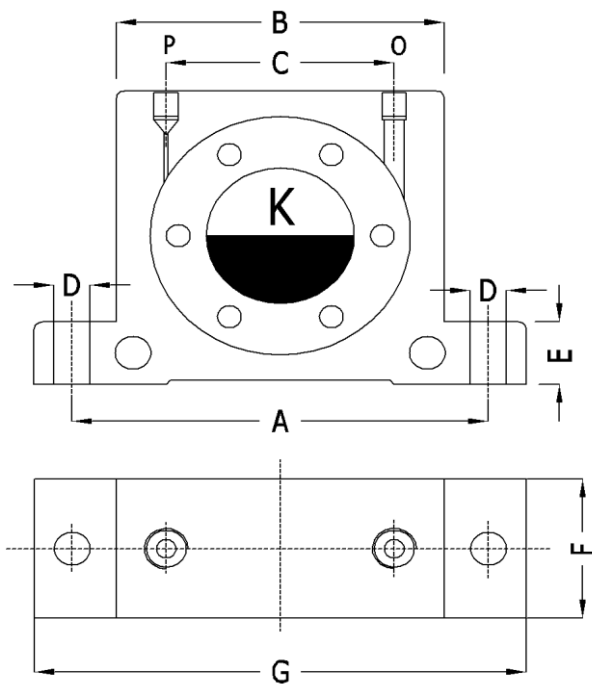

Dimension Table

Unit: (mm)

Type	A	B	C	D	E	F	G	P/O	Weight (g)
K-10	68	51	28	7	12	22	86	1/4	150
K-16	90	66	39	9	16	27	113	1/4	330
K-20	104	82	57	9	17	38	128	1/4	690
K-25	104	82	57	9	17	38	128	1/4	690

Technical Parameters

Type	Frequency (V.P.M)			Vibration Power (N)			Air Consumption (/min)		
	0.2 MPa	0.4MPa	0.6MPa	0.2MPa	0.4MPa	0.6MPa	0.2MPa	0.4MPa	0.6MPa
K-10	22.500	27.250	34.100	245	465	700	90	150	190
K-16	13.250	17.500	19.000	440	820	1.200	100	190	270
K-20	10.000	12.750	14.111	950	1.675	2.000	150	270	400
K-25	10.000	12.750	14.111	950	1.675	2.000	150	270	400